

Tracked Paver

# SUPER 1600-2



## SUPER 1600-2

Maximum Pave Width 8m

Maximum Laydown Rate 600 tonnes/h

Transport Width 2.55m

## Tracked High-Tech Paver in the Mid Range



As a member of the „dash 2“ generation of VÖGELE pavers, the tracked SUPER 1600-2 completely redefines the state of the art in its class. With a maximum pave width of 8m and a maximum laydown rate of 600 tonnes/h, this high-performance paver is the perfect machine for medium and large paving jobs.

Among the tracked machine's true highlights is ErgoPlus®, the VÖGELE concept for paver handling. Thanks to ErgoPlus®, operators have never had it so good in terms of simplicity and ease of operation. Operators enjoy a modern workplace of ergonomic design leaving nothing to be desired.

The SUPER 1600-2 is equipped with high-quality drive components and a highly advanced material handling system, allowing it to achieve top values in terms of efficiency and performance. Thanks to its compact size, the SUPER 1600-2 is ideal for a large variety of paving applications.

### SUPER 1600-2

#### At a Glance



- ▶ Maximum pave width 8m
- ▶ Laydown rate up to 600 tonnes/h
- ▶ Maximum layer thickness 30cm
- ▶ Transport width 2.55m
- ▶ Pave speed up to 24m/min.
- ▶ Travel speed up to 4.5km/h
- ▶ Powerful PERKINS engine rated at 100kW
- ▶ Comes with ErgoPlus®, the concept for easy paver handling
- ▶ Hardtop with wide sunshades

## Tracked Paver SUPER 1600-2



## Economical Drive System

The powerful PERKINS engine installed in the SUPER 1600-2 is highly efficient. Three speed ranges – MIN, ECO and MAX – allow the engine output to be regulated economically and in an eco-friendly manner. ECO Mode (95kW at 1,800 rpm) is sufficient for a host of jobs. It further reduces the noise emissions of the already quiet engine and also decreases fuel consumption and wear.

A crucial factor in achieving good paving quality is a constant operating speed. To this end, an intelligent Engine Management System ensures that sufficient engine power is available in every paving situation, while simultaneously conserving fuel.

To ensure that the SUPER 1600-2 can always deliver 100% of its performance even at high ambient temperatures and when operating at full load, it is equipped with an amply dimensioned cooler assembly. Together with innovative air routing, the cooling system guarantees that the paver can be used without restrictions in every climate zone the world over.

The SUPER 1600-2 can thus always make maximum use of its strong points, while its efficient drive system guarantees eco-friendly and economical operation.



- ▶ Powerful PERKINS engine developing 100kW at just 2,000 rpm. The quiet engine complies with the strict European exhaust emissions standard Stage 3a and the US standard EPA Tier 3.
- ▶ Different speed ranges are available which select conveniently at the push of a button (MIN, ECO, MAX).
- ▶ The economical ECO Mode (95kW at 1,800 rpm) is sufficient for a large number of paving jobs.
- ▶ An Electronic Engine Management System provides for a constant pave speed and, as a result, optimum paving quality.
- ▶ Engine throttle control helps save fuel as it automatically revs down the engine during a break in paving. When resuming work, engine rpm is reset automatically to the preset range (ECO Mode or MAX).
- ▶ Powerful three-phase A.C. generator with Generator Management controlling generator output in compliance with the pave width. Heating the screed's compacting systems to operating temperature takes a short time only.
- ▶ Thanks to a large cooler assembly with innovative air routing, perfect cooling of engine cooling liquid, hydraulic oil and charge air. Noise emission is very low.
- ▶ A constantly high cooling capacity provides for ideal temperatures inside the hydraulic system and top performance of all drive units even when working under full load, in all climatic zones the world over.
- ▶ For hydraulic functions, powerful separate drives are installed operating in closed circuits, thus delivering highest outputs. This way, the transfer gearbox translates engine power into hydraulic paver performance with excellent efficiency.

## Excellent Traction



Even difficult terrain is no problem for the SUPER 1600-2 thanks to its powerful crawler tracks and accurate steering. In terms of traction, too, the VÖGELE drive concept leaves nothing to be desired.

- Thanks to powerful separate drives fitted into the sprockets for crawler tracks, engine output is translated into pave speed with no loss of power.
- Long crawler tracks with large footprints provide for maximum tractive effort, allowing the paver to get on well at a constant speed even when operating on difficult terrain.
- Positive tracking when moving straight and accurate turning of radii due to separate drive and electronic control provided for each crawler track.

## Easy Feed with Mix



Large oscillating push-rollers for convenient and shock-free docking of feed vehicles even when paver working on a bend.

- The large material hopper holding 13 tonnes is amply dimensioned so that a sufficient quantity of mix is stored at all times. No problem to tide over difficult situations such as paving under bridges, for instance.
- Thanks to a hydraulically operated hopper front (option), no spills of mix when feed lorries change. Directs the mix inside the material hopper right onto the conveyors, so no hand work with shovels required. The entirety of mix is properly conveyed in front of the screed.

## Optimal Flow of Mix in Front of the Screed



Due to perfect spreading of mix, the SUPER 1600-2 provides for an optimal head of material in front of the screed in every paving situation. Powerful, separate hydraulic drives for conveyors and augers are installed achieving laydown rates up to 600 tonnes/h.

- ▶ Powerful, separate hydraulic drives for conveyors and augers installed for high laydown rates up to 600 tonnes/h.
- ▶ Proportional control and continuous monitoring provided for conveyors and augers guarantee a constant head of mix in front of the screed in conformity with the requirement.
- ▶ The height of the auger, complete with bearing boxes and limiting plates for the auger tunnel, is infinitely variable by up to 20cm across the entire pave width. This results in optimal spreading of mix in front of the screed, even when paving thin layers or when the layer thickness varies.
- ▶ Large diameter of auger blades (400mm) for excellent spreading of mix when paving in large widths.
- ▶ An auger tunnel, easily variable in depth, provides for an optimal flow of mix when paving thick layers.

## Maintenance Made Easy



The well-thought-out maintenance and service concept is perfectly geared to the requirements of the workshop and service staff.

- ▶ A wide engine hood and large hinged panels give convenient access to service points on the machine.
- ▶ All hydraulic pumps attached to the transfer gearbox. Their clear arrangement and easy access provides for service-friendliness at the highest level.
- ▶ Centralized lubrication system installed to automatically supply required amounts of grease to bearings of conveyors and augers.
- ▶ Sturdy components of highly wear-resistant materials for long service lives minimize downtime.
- ▶ A standardized service concept for all VÖGELE pavers simplifies maintenance and cuts expenditure on training.

# VÖGELE ErgoPlus®

## The User-Friendly Operating System



Even the best machine with the most advanced technology can only really show its strengths if it can be operated easily and as intuitively as possible, and offers to the operator a maximum of ergonomic comfort and workplace safety. Therefore, the ErgoPlus® operating concept focuses on the operator.

The example diagrams on the following pages will provide you with additional information on the extensive functions of the ErgoPlus® operating concept. ErgoPlus® encompasses the operator's stand, the paver operator's and screed consoles and NIVELTRONIC Plus®, the System for Automated Grade and Slope Control.

The operating consoles are designed for optimum clarity, presenting all paver functions in logical groups. There's a place for everything and everything in its place on the operator's stand, and the paver operator has an excellent overview of all the key points of the paver.

All told, the ErgoPlus® operating concept enables the operator to respond to job site working processes and situations more quickly and accurately, giving him total control over the machine and the project.

### The Strong Points of ErgoPlus®

- ▶ Operator platform of streamlined design and well organized for a high level of safety at work.
- ▶ The paver operator's seats and the operating console adjust conveniently and easily in keeping with his personal needs. This provides a maximum of ergonomic comfort.
- ▶ All vital paver functions are clustered in logical groups on the paver operator's console. Their operation is easy to learn.
- ▶ Easy operation of VÖGELE NIVELTRONIC Plus®, the System for Automated Grade and Slope Control, to achieve perfect paving results.
- ▶ The ErgoPlus® paver operator's console is of modular design. This smart concept is not only ideal in practice, but also saves costs. In case of need, it offers the great advantage of easy replacement of single modules without having to replace the entire unit.



ErgoPlus® Paver Operator's Console



ErgoPlus® Screed Console



ErgoPlus® Operator Stand

A man wearing a black beanie and a bright orange high-visibility jacket with reflective silver stripes is seated on a paver machine. He is looking forward, focused on his work. His hands are on the control console, which features two joysticks and numerous buttons. The background shows a green field under a clear sky.

# THE ErgoPlus<sup>®</sup> PAVER OPERATOR'S CONSOLE

Full Control for the Machine Operator

# THE ErgoPlus® PAVER OPERATOR'S CONSOLE

Clear and Logical Arrangement of Controls


The ErgoPlus® paver operator's console has been designed according to practice-related principles. All controls are clearly arranged. Paver functions are clustered in logical groups so that operators find their controls where they suppose these should be.

On the ErgoPlus® console, all push-buttons are easily identifiable by touch even when wearing work gloves.


Once a button is pressed, off you go. This is due to the "Touch and Work" principle. This means that a function is executed directly – without a need to confirm.

As darkness falls, the paver operator's console is back-lit automatically, as you have it in your car. This makes night-time work easy and relaxed.


## Examples of Paver Functions




**Reversing Conveyor Movement**  
In order to avoid mix dropping from the conveyors during a move of the paver on the job site, conveyor movement can be reversed at the push of a button. Reverse movement, transferring mix from the rear of the conveyor tunnel back inside, takes place for a short time only and stops automatically.




**No-Load Function**  
The No-Load function is provided for warm up or cleaning of conveyors, augers and tamper.

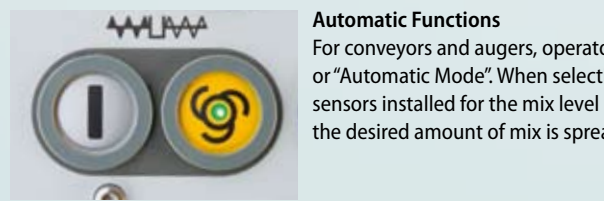

**Automatic Functions**  
For conveyors and augers, operators can easily select "Manual Mode" or "Automatic Mode". When selecting "Automatic Mode" for the augers, sensors installed for the mix level in the auger tunnel provide that exactly the desired amount of mix is spread in front of the screed.

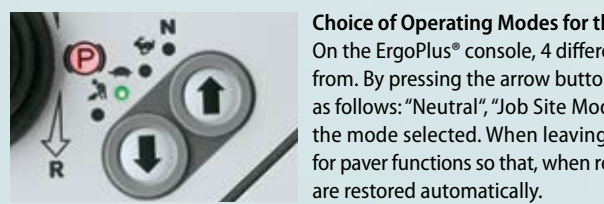

**Choice of Operating Modes for the Paver**  
On the ErgoPlus® console, 4 different operating modes for the paver are available to select from. By pressing the arrow buttons, up or down, the operator changes modes in the order as follows: "Neutral", "Job Site Mode", "Positioning Mode" and "Pave Mode". A LED indicates the mode selected. When leaving "Pave Mode", a smart Memory feature stores last settings for paver functions so that, when resuming work after a move of the paver on site, these settings are restored automatically.

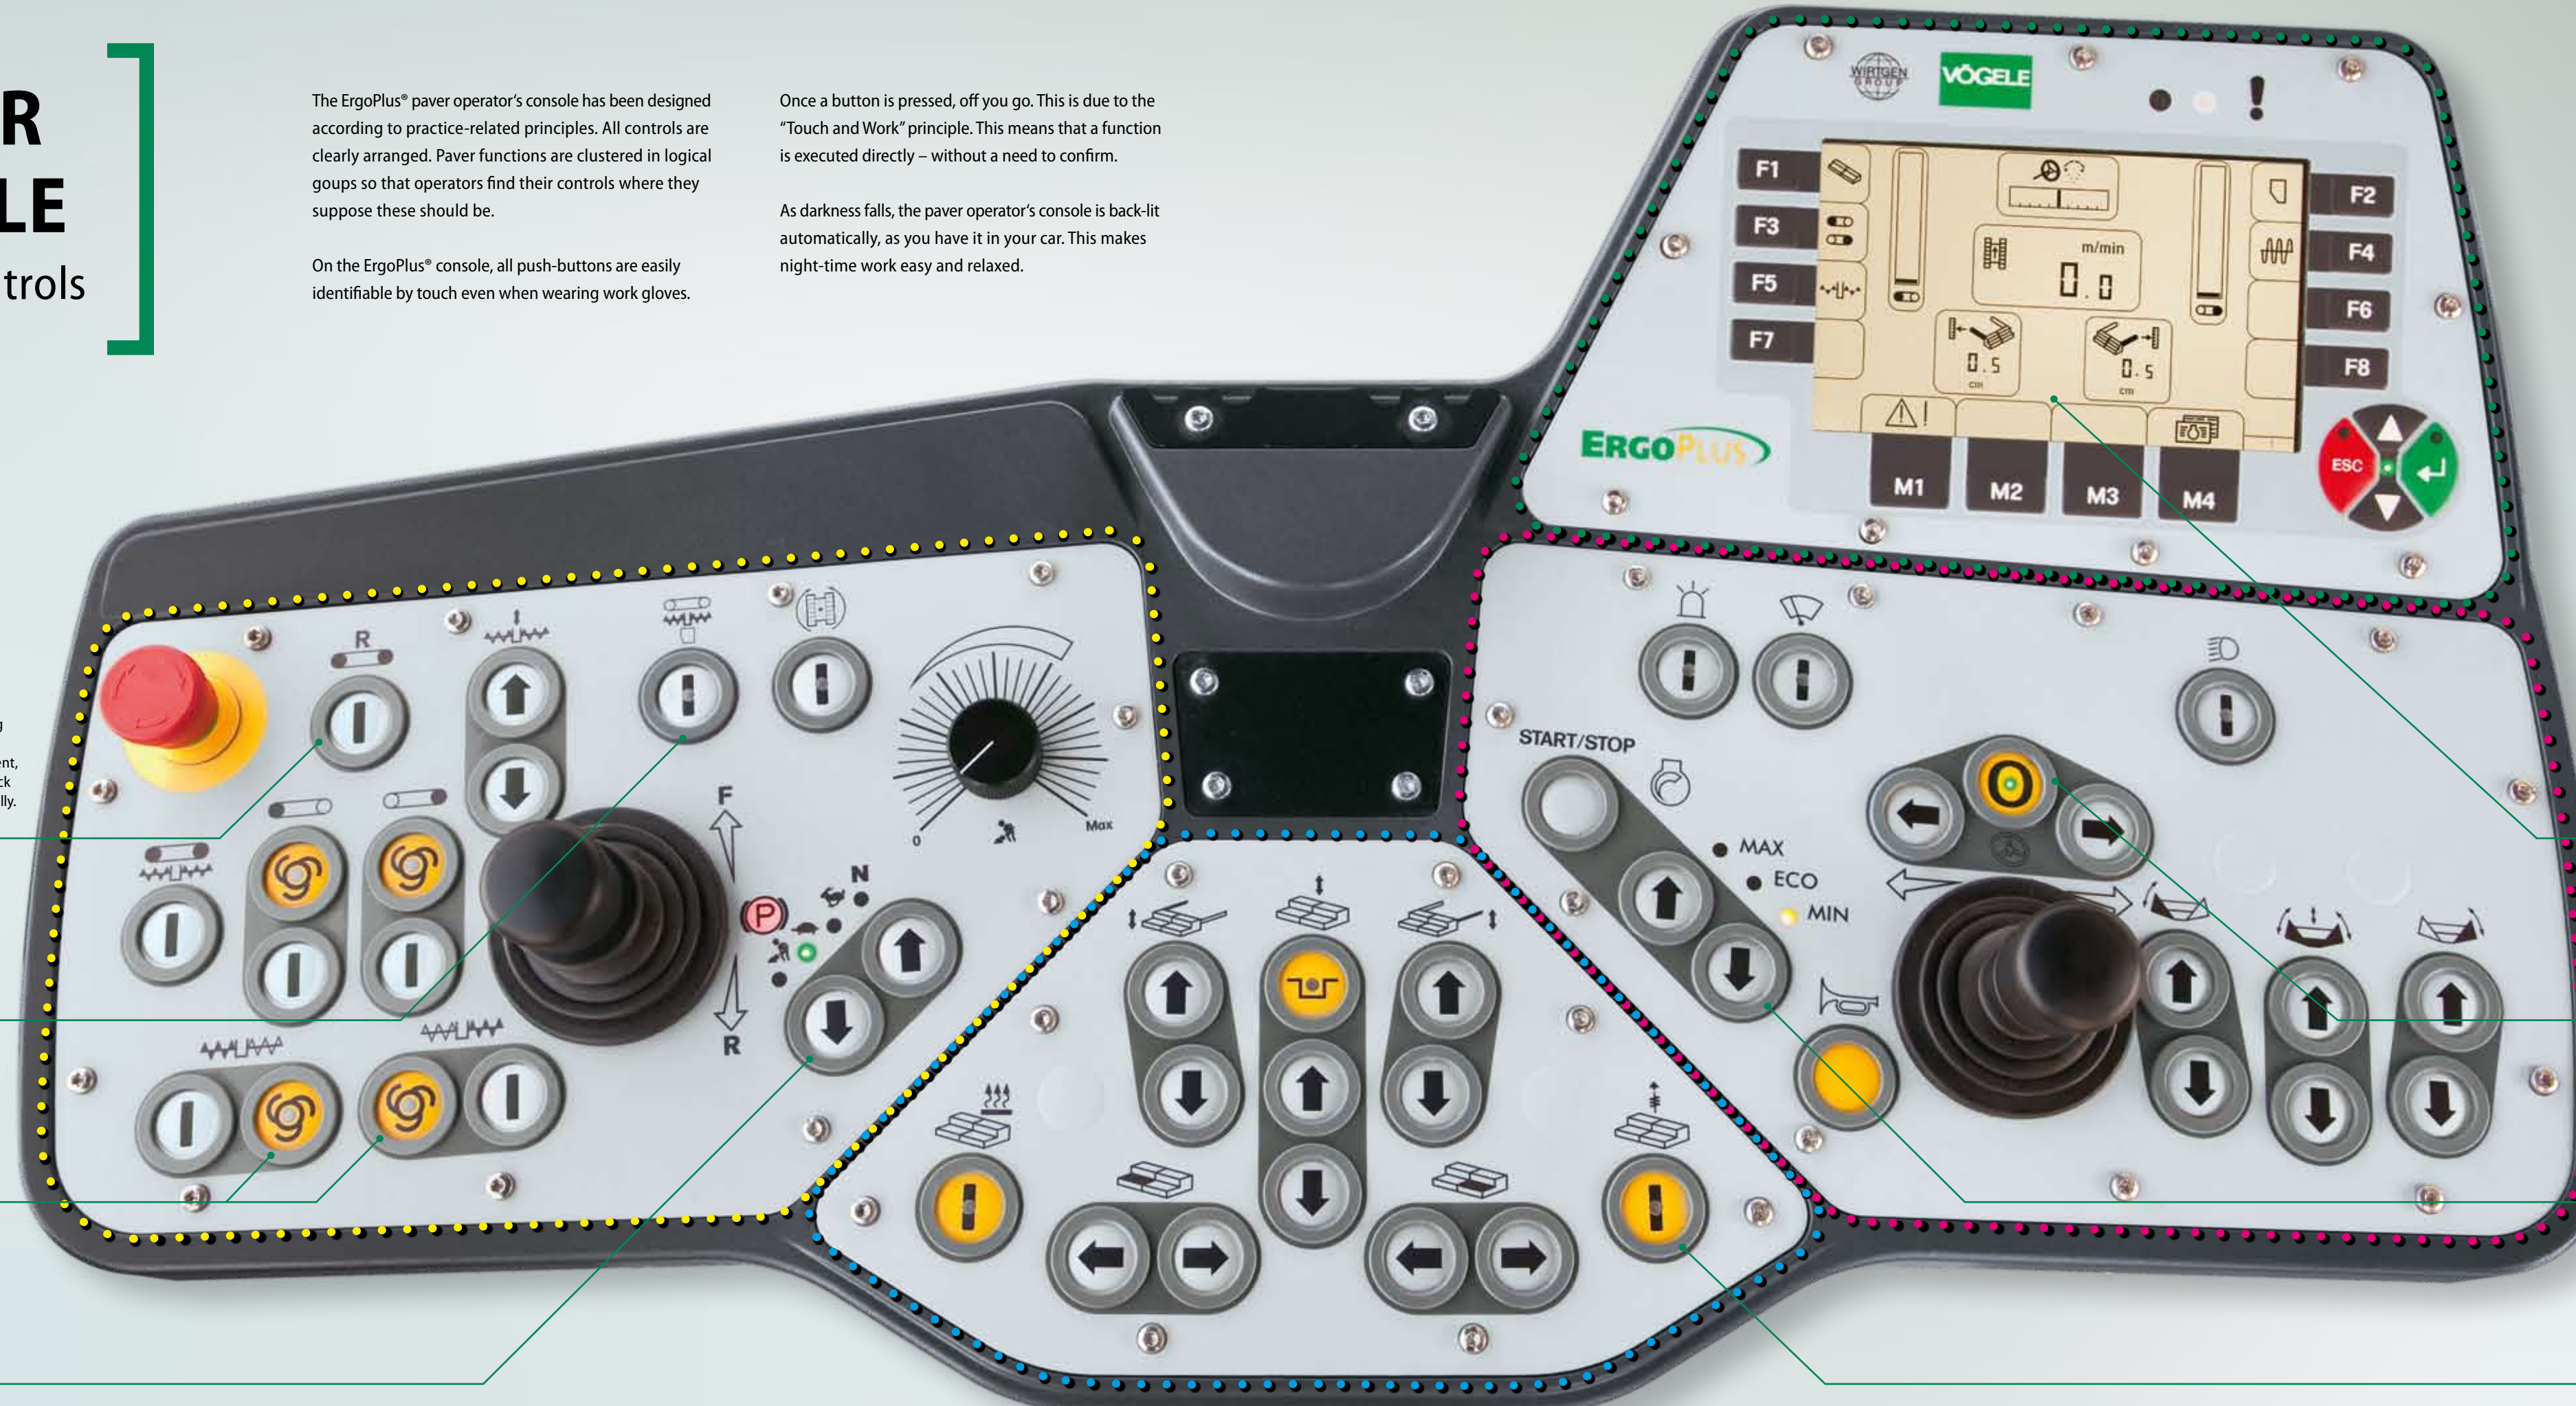

● ● ● ● ● ● **Module 1:**  
Conveyors and Augers, Traction

● ● ● ● ● ● **Module 2:**  
Screed

● ● ● ● ● ● **Module 3:**  
Material Hopper and Steering

● ● ● ● ● ● **Module 4:**  
Display for set-up of vital paver functions on menu level 1.  
Secondary functions on menu level 2.

**Display of the Paver Operator's Console**  
The large, easy-to-read display shows vital information on menu level 1 – such as the positions of the screed tow point rams or the pave speed. Set-up of further paver functions such as speeds for tamper and vibrators or feed rate for the conveyors can easily be made via the display, too. And the display gives access to machine-related information such as fuel consumption or service hours.

**Steering**  
For turning a large radius, fine steering allows to pre-set a track position which is maintained automatically without a need for manual intervention by the operator.

**Choice of Engine Speed Ranges**  
For the engine, 3 modes exist to select from: MIN, ECO and MAX. To swap modes for engine rpm, all the operator needs to do is press the arrow buttons, up or down. In ECO Mode, the engine delivers sufficient power for a great number of paving applications. Operating in ECO Mode reduces noise emission and fuel consumption considerably.

**Screed Assist (Option)**  
This button switches Screed Assist on (LED lights up) or off. Screed Assist pressure and balance can be set via the display. Screed Assist is active only when the screed floats.



# THE ErgoPlus® SCREED CONSOLE

## Easy Operation Guaranteed

Crucial for pavement quality is the screed. Therefore, easy and positive handling of all screed functions is of utmost importance for high-quality road construction.

With ErgoPlus®, the screed operator has the process of paving at his fingertips. All functions are easily comprehensible and all controls are clearly arranged.

### The Screed Console

The screed console is designed in keeping with the conditions prevailing on the job site. For the frequently used functions operated from the screed console, push-buttons are provided. These are watertight and enclosed in perceptibly raised rings, so that they are identifiable blindfold simply by touch even when wearing work gloves. Important paver and screed data can be called up and adjusted from the screed console, too.



### The Display of the Screed Console

The display of his console allows the screed operator to control and monitor both the left and the right side of the screed. Machine-related parameters such as tamper speed or conveyor speed can be adjusted conveniently via the display panel of the screed console. The clear menu structure, combined with easily understandable, self-explanatory symbols neutral in language, makes operating the display panel both simple and safe.



### NIVELTRONIC Plus® (Option)

NIVELTRONIC Plus®, the cutting-edge VÖGELE System for Automated Grade and Slope Control, is very easy to learn and achieves outstanding paving results. All important functions of NIVELTRONIC Plus® can be accessed directly on menu level 1. The operator is provided with a variety of information, such as the sensor currently selected or the specified and actual values for layer thickness.

An electronic system installed in the screed tow point rams picks up the tow points' positions. Display of the current tow point positions and of the transverse slope on the screed console greatly facilitates set-up of the screed. All sensors connected are recognized automatically by NIVELTRONIC Plus® and can be monitored and controlled from either screed console. An open interface is provided for connection of a GPS system, thus permitting 3D paving.




### Automatic Mode for Augers, Reversing Auger Rotation

Just like the paver operator, the screed operator, too, can select Manual Mode or Automatic Mode for conveyors and augers. Very useful and comfortable in practice is the function of "Reversing Auger Rotation".



# THE ErgoPlus® OPERATOR STAND

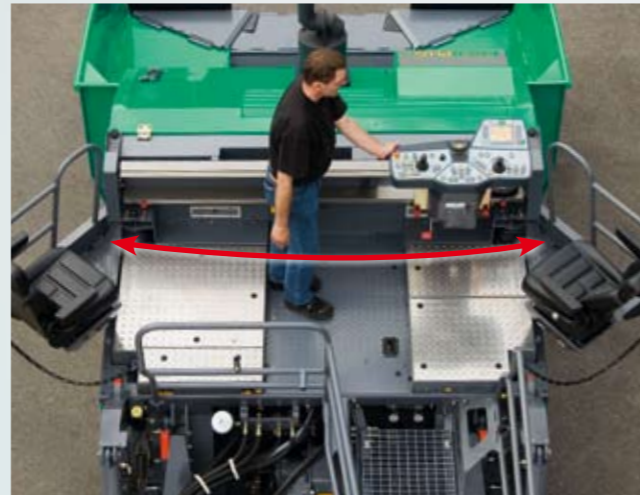

## Excellent All-Round Visibility

- ▶ The comfortable operator stand gives unobstructed view of all crucial areas on the paver such as material hopper, steering guide or screed. It allows the paver operator to closely monitor the paver's feed with mix and the process of paving.
- ▶ The seats swinging out to the sides and an operator stand of streamlined design provide for maximum visibility of the auger tunnel, thus permitting the paver operator to keep an eye on the head of mix in front of the screed at all times.

## Working Comfort

- ▶ A few adjustments are all it takes for the paver operator to position his console exactly in keeping with his personal needs. It can be displaced across the full width of the operator's stand, swivelled out to the sides and tilted.
- ▶ When working with the seat swung out, the paver operator's console can be swivelled out together with the operator's seat. In this way, an ergonomically optimized workplace is set up in no time at all. A legroom kept warm adds to operator comfort during the cold season.

## A Place for Everything and Everything in its Place

- ▶ The operator's stand of streamlined design is well organized, so that the paver operator enjoys a professional workplace.
- ▶ The operator's console can be protected by a shatter-proof cover to prevent wilful damage.
- ▶ Plenty of stowage space makes it easy to keep the machine tidy. Access to all vital service points on the machine has been designed to be extremely clear and ergonomic.

## Hardtop Gives Excellent Protection

- ▶ The modern hardtop made of glass fibre reinforced polymer material shelters the operator whether rain or shine. The hardtop, including exhaust pipe, raises up or lowers down quickly and with effortless ease by a manually operated hydraulic pump. Wide sunshades, extending easily, give the operator optimal protection when his seat is moved out.
- ▶ Six bright working lights are integrated into the hardtop. Raising the lights in this way floods the job site with light (Xenon lamps available as an option).

## High Compaction Screeds



For the SUPER 1600-2, VÖGELE offer two screed options, both of them perfectly capable of achieving excellent pavement quality. Which one to prefer primarily depends on the kind of your paving applications.

- ▶ The tracked SUPER 1600-2 combines with AB 500 and AB 600 Extending Screeds. Either screed confers upon the paver high variability for a wide range of applications and optimal utilization.
- ▶ AB 500 and AB 600 Extending Screeds come with a sturdy single-tube telescoping system. Working with highest precision, they offer quick screed width control accurate to the millimetre.

- ▶ For many jobs, however, the compacting effort is a key factor and not just the pave width. That is why both screeds are available in the versions TV (with tamper and vibrators), as well as TP1 and TP2 (with tamper and 1 or 2 pressure bars) for high compaction.
- ▶ **Transverse Pavement Profiles**
  - Positive and negative crown can be paved with all screed types.
  - The AB screeds' extending units adjustable in height and spindles provided on either side of each extending unit allow the Extending Screeds to be set up to a variety of additional special profiles.

- ▶ **Electric Screed Heating**
  - Homogeneous surface texture thanks to uniform heating of screed plates, tamper bars and pressure bar(s).
  - Even with the paver's engine running at minimum rpm, the time required for the screed to reach its operating temperature is reduced substantially thanks to an intelligent Generator Management.
  - With paver functions set to automatic, the Generator Management activates Alternating Mode for screed heating (heats the screed alternately to left and right), a feature which is easy on the engine and reduces fuel consumption considerably.

# The Screed Options for SUPER 1600-2



## AB 500


### Pave Widths

- Infinitely variable range from 2.55m to 5m.
- Larger widths by addition of bolt-on extensions up to a maximum of 8m.

### Compacting Systems

- AB 500 TV with tamper and vibrators
- AB 500 TP1 with tamper and 1 pressure bar
- AB 500 TP2 with tamper and 2 pressure bars

AB 500 TV built up to maximum pave width

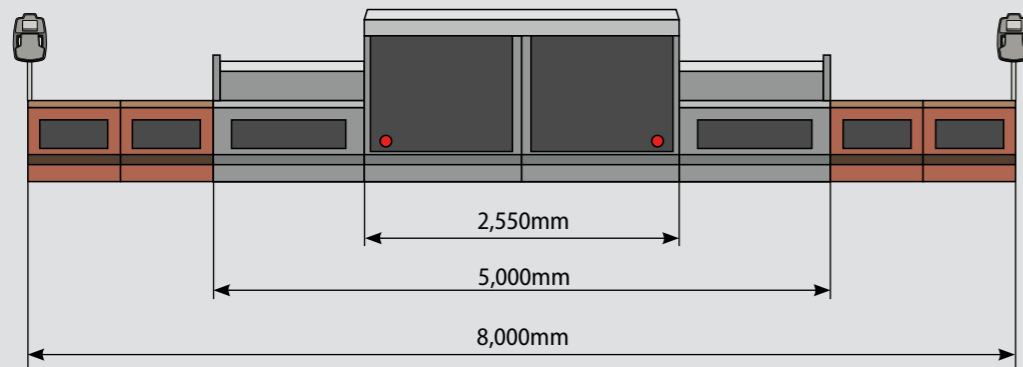

The split footboard of the screed folds up easily for transport.



## AB 600


### Pave Widths

- Infinitely variable range from 3m to 6m.
- Larger widths by addition of bolt-on extensions up to a maximum of 8m.

### Compacting Systems


- AB 600 TV with tamper and vibrators
- AB 600 TP1 with tamper and 1 pressure bar
- AB 600 TP2 with tamper and 2 pressure bars

AB 600 TV built up to maximum pave width

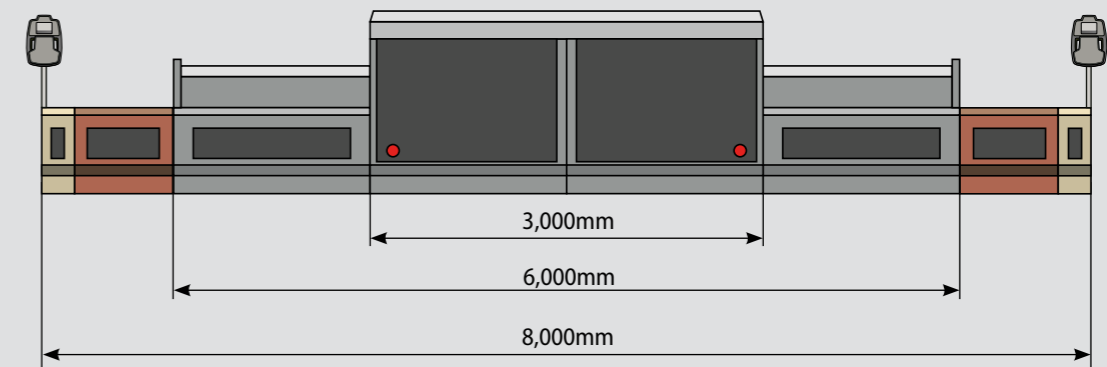

Amplly dimensioned, sturdy telescoping tubes featuring high-precision operation. They provide for excellent stability of the screed.



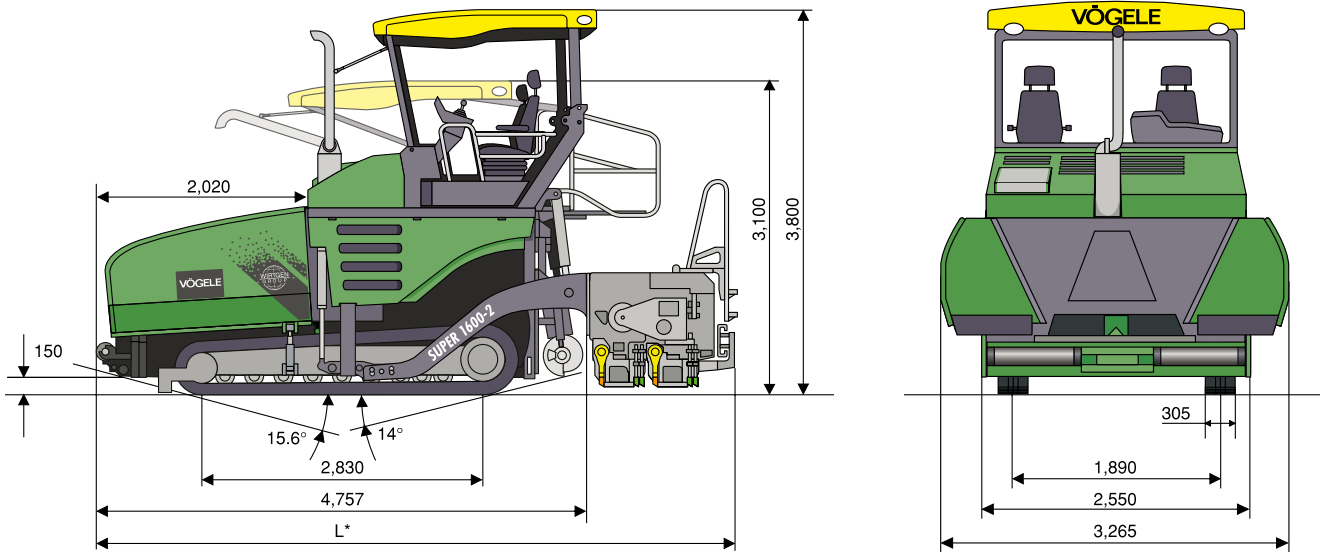

Dimensions in mm  
L\* = Dependent on Screed Type (see Specification)

**Power Unit**

Engine:	4-cylinder PERKINS diesel engine, liquid-cooled
Type:	1104D-E44TA
Output:	Nominal: 100kW at 2,000 rpm (according to DIN) ECO Mode: 95kW at 1,800 rpm
Fuel Tank:	300 litres
Electrical System:	24 V

**Undercarriage**

Crawler Tracks:	provided with rubber pads
Ground Contact:	2,830mm x 305mm
Suspension:	rigid
Track Tension Adjuster:	spring assembly
Track Rollers:	lifetime grease lubricated
Traction Drive:	hydraulic, separate drive and electronic control provided for each crawler track
Speeds:	- Paving: up to 24m/min., infinitely variable - Travel: up to 4.5km/h, infinitely variable
Steering:	by alteration of track running speeds
Service Brake:	hydrostatic
Parking Brake:	spring-loaded multiple-disk brake, maintenance-free

**Material Hopper**

Hopper Capacity:	13 tonnes
Width:	3,265m
Feed Height:	594mm (bottom of material hopper)
Push-Rollers:	oscillating, displaceable forwards by 100mm

**Conveyors and Augers**

Conveyors:	2, with replaceable feeder bars, conveyor movement reversible for a short time
	Drive: hydraulic, separate drive provided for each conveyor
	Speed: up to 25m/min., infinitely variable (manual or automatic)

Augers:	2, with replaceable auger blades, auger rotation reversible
	Diameter: 400mm
	Drive: hydraulic, separate drive provided for each auger
	Speed: up to 83 revs/min., infinitely variable (manual or automatic)
	Auger Height:
	- Standard: infinitely variable by 14cm, mechanical
	- Option: infinitely variable by 20cm, hydraulic (lowest position 5cm above the ground)
Lubrication:	Centralized Lubrication System with electrically driven grease pump for conveyor and auger bearings

**Screed Options**

AB 500:	basic width 2.55m, infinitely variable range 2.55m to 5m maximum width (TV) 8m
AB 600:	basic width 3m, infinitely variable range 3m to 6m maximum width (TV) 8m
Screed Versions:	TV, TP1, TP2
Layer Thickness:	up to 30cm
Screed Heating:	electric by heating rods
Power Supply:	three-phase A.C. generator

**Dimensions and Weights**

Length:	Tractor Unit and Screed in Transport Position:
	- AB 500/AB 600 TV: 6m
	- AB 500/AB 600 TP1/TP2: 6.1m
Weights:	Tractor Unit with AB 500 Screed in TV Version:
	- Pave Widths up to 5m: 18.4 tonnes
	- Pave Widths up to 8m: 20.7 tonnes

**Optional Equipment**

Hydraulic hopper front. Hardtop of glass fibre reinforced polymer material. NIVELTRONIC Plus® for Automated Grade and Slope Control (various sensors available). Sonic sensors to monitor head of mix in front of the screed. Automated Steering Control. Washdown system. Xenon lamps for working lights. Operator's seat, ergonomic design and heated. For more optional extras please contact your VÖGELE partner.

Key: T = equipped with Tamper P1 = equipped with 1 Pressure Bar AB = Extending Screed  
V = equipped with Vibrators P2 = equipped with 2 Pressure Bars

Technical alterations reserved.

© ErgoPlus, InLine Pave, NIVELTRONIC, NIVELTRONIC Plus, NAVITRONIC, NAVITRONIC Plus, RoadScan and V-TRONIC are registered Community Trademarks of JOSEPH VÖGELE AG, Ludwigshafen/Rhein, Germany. PCC is a registered German Trademark of JOSEPH VÖGELE AG, Ludwigshafen/Rhein, Germany. NIVELTRONIC Plus and NAVITRONIC Plus are trademarks registered in the US Patent and Trademark Office to JOSEPH VÖGELE AG, Ludwigshafen/Rhein, Germany. Legally binding claims cannot be derived from written information or pictures contained in this brochure. Pictures may include optional extras. We reserve the right of technical or design alterations.

**JOSEPH VÖGELE AG**

Joseph-Vögele-Str. 1  
67075 Ludwigshafen · Germany  
marketing@voegele.info

Telephone: +49 (0)621 8105 0  
Fax: +49 (0)621 8105 461  
www.voegele.info

Your VÖGELE QR Code leading you directly to the "SUPER 1600-2" on our website.

